

Disc-O-Mulch[®] Gold


Independent disc stubble-breaker



The Professional's Choice

Exclusive technology

Disc-O-Mulch® Gold mounted

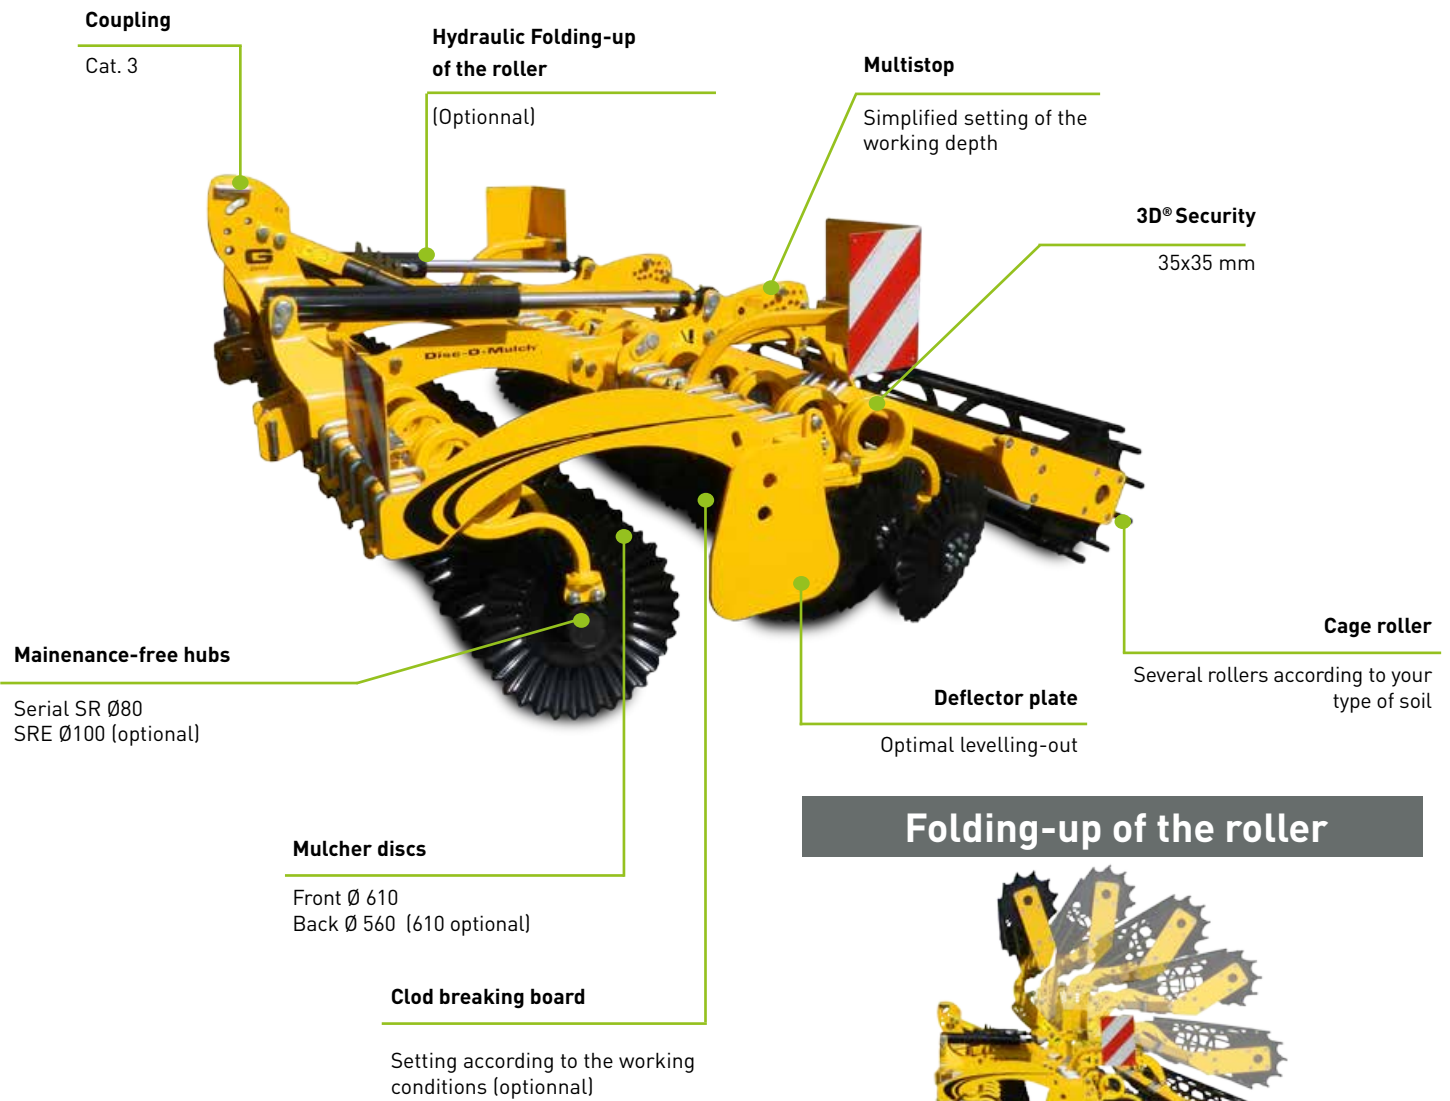


Folding-up of the roller



- + - Hydraulic folding-up
- + - Rebalance of the weight during the transport

The specialist's experience

A multipurpose machine which adapts itself to all uses

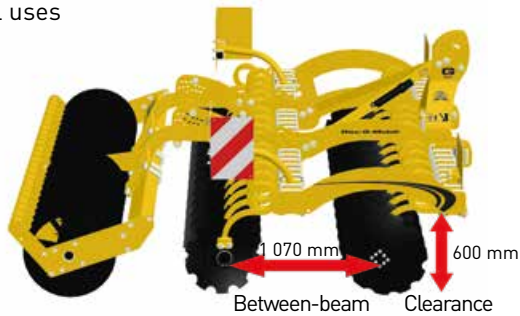

- + - Independant discs - one shock absorber per disc
- + - Important release under the frame
- + - Large between-beams for the destruction of the crops


3D security with percussion effect

Positive pan and working angles



- + - Quality of work
- + - Energy saving
- + - Maintenance free

Disc-O-Mulch® Gold semi-mounted

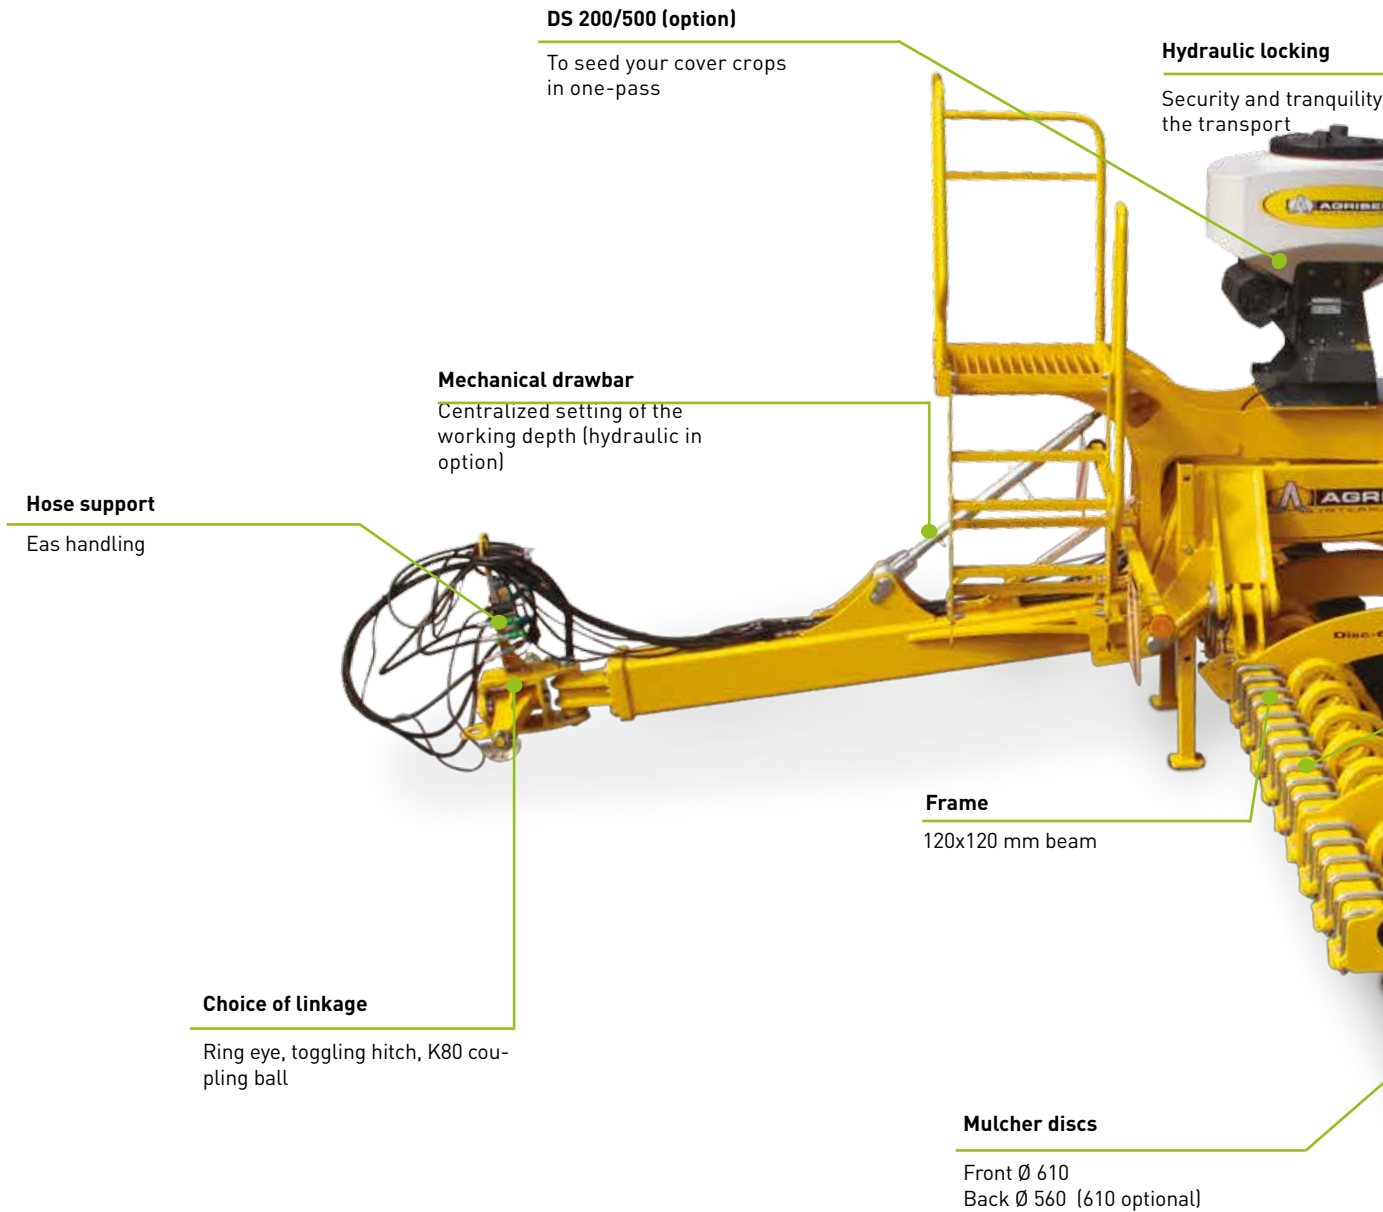

Maintenance free hubs

The biggest hubs on the market
SR = 80 mm / SRE = 100 mm


Rotation to copy row of balls with contact obliques
Double joint Cassette



Concurrence 



SRE hub insection


- Sans entretien
-  - Moyeux étanches = fiabilité
- Possibilité de travailler à haute vitesse

Clod-breaking board

Disposed behind the row of discs


PATENTED



-  - Additional refining
- Optimal levelling
- Regulation of the flow of soil

Intensive use in complete sa

Work up to 15 cm deep Penetration : 800 - 1 000 kg/m From 8 to

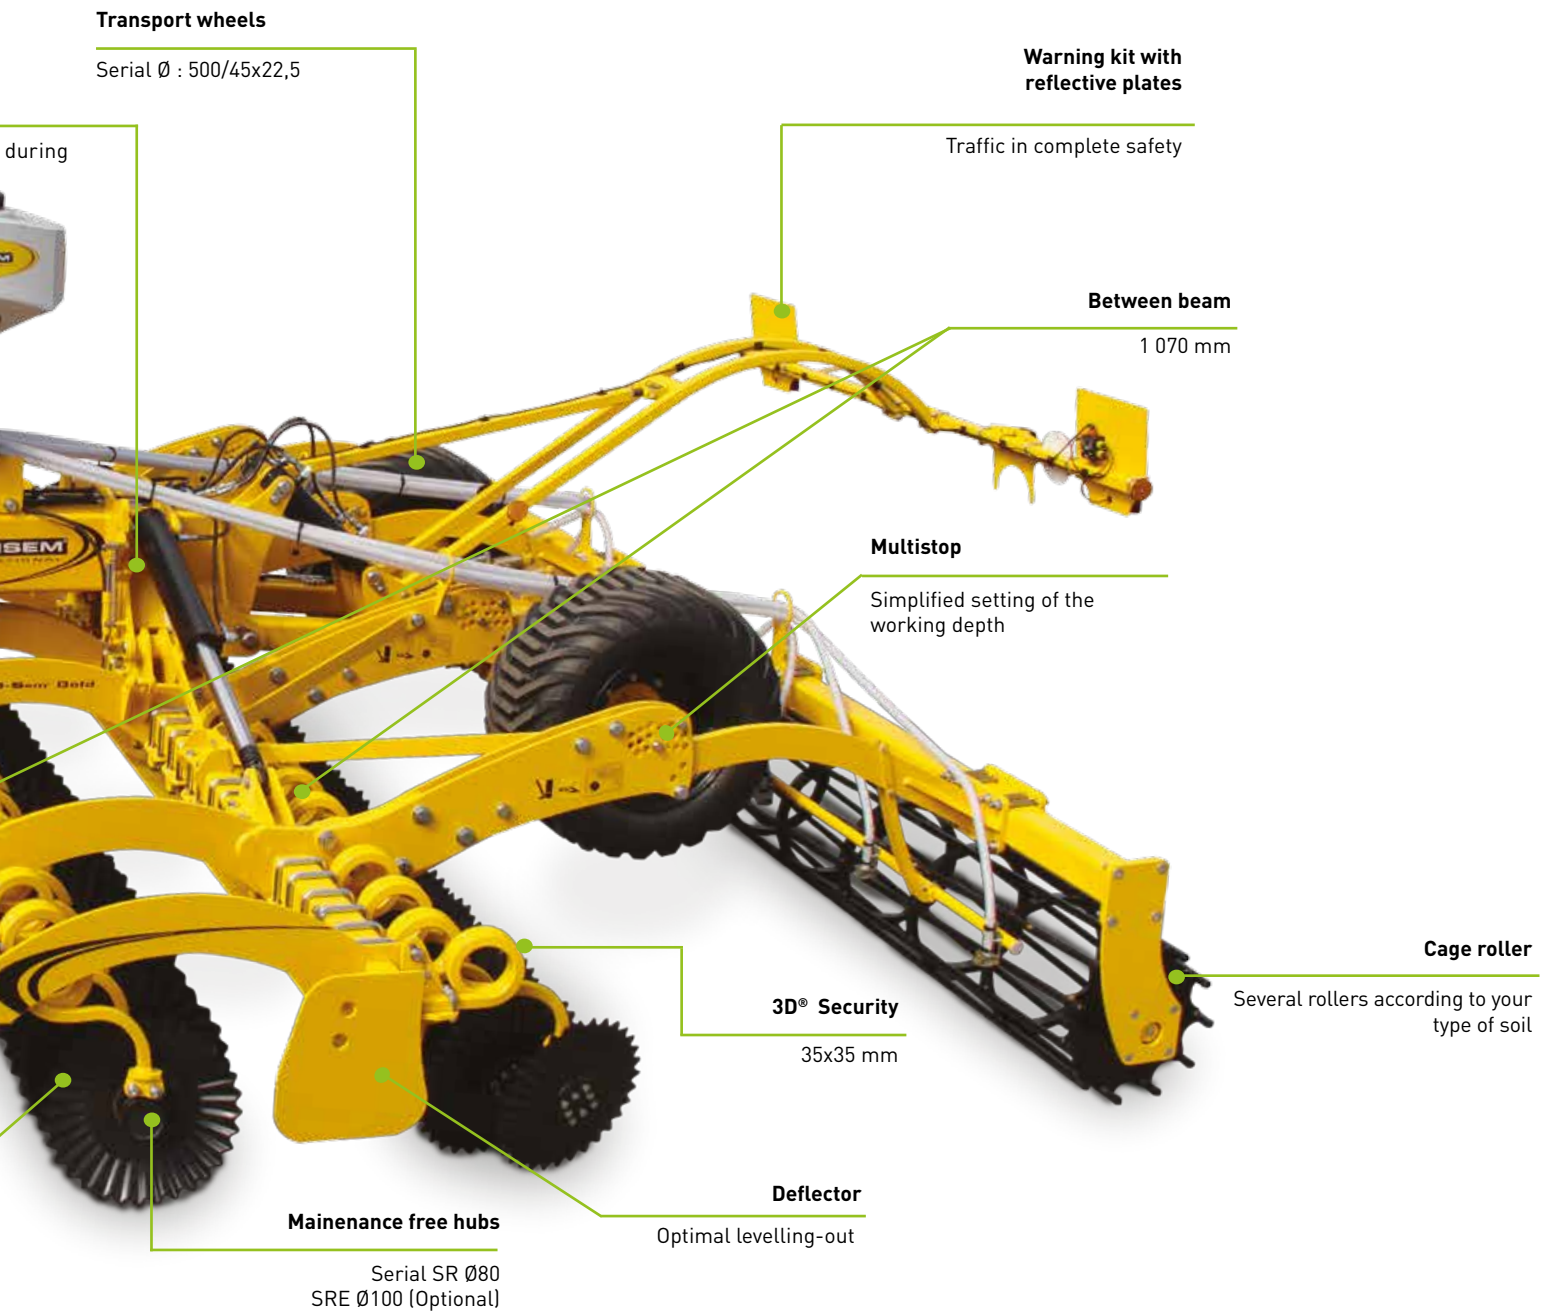

Double diameter of the discs

The front discs have a bigger diameter than the back ones

PATENTED



- + - More release at the front
- + - Better refinement at the back
- + - Homogeneous wear on both rows of discs

MULCHER disc

Grooved profile on all its working height



- + - Maximum mincing of crop
- + - Self-cleaning in wet conditions
- + - Unchanged working quality with the wear of the disc


Unequalled performances

Disc-O-Mulch® 7,5 et 9 m

Folding-up exclusive for AGRISEM

Width and compactness in one machine

Step 1 : Folding

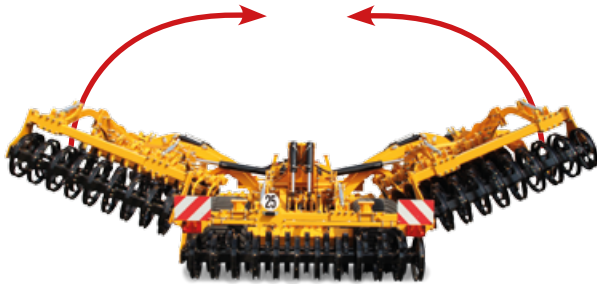

Step 2 : Pulling down



Ready for transport !

→ 3,65m for the DOM 7,50m
→ 4,40m for the DOM 9,00m



Specifications



Approved machine



DS 200/500



DSF 1000



DSF 1600

MOUNTED		Fix versions			Foldable versions		
Working width	3,00 m	3,50 m	4,00 m	4,00 m	4,50 m	5,00 m	
Weight (kg) with cage roller	2 130	2 300	2 620	3 150	3 600	3 860	
Power (hp)	75 - 130	90 - 160	110 - 180	110 - 180	130 - 200	150 - 220	
Number of discs	24+1	28+1	32+1	32+1	36+1	40+1	

SEMI-MOUNTED				Foldable versions			
Working width	4,50 m	5,00 m	6,00 m	7,50 m	9,00 m	10,00 m	12,00 m
Weight (kg) with cage roller	5 570	6 070	6 380	9 100	10 020	13 330	15 680
Power (hp)	150 - 210	170 - 250	190 - 280	230 - 360	300 - 420	350 - 450	350 - 450
Number of discs	36+1	40+1	48+1	60+1	72+1	80 + 1	96+1


ROLLERS




Flexi-Pack Ø700




Cage Ø526



V-Sem Ø600

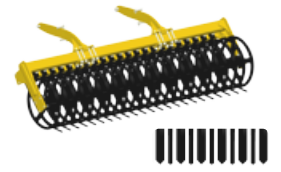


Levelling harrow

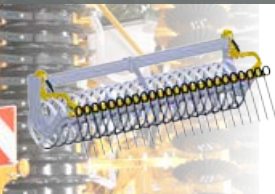


T-Sem Ø620



Flexi-Roll Ø600

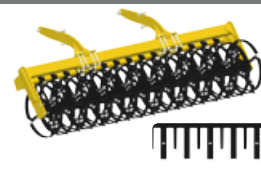


Agrix Ø500 and Ø700

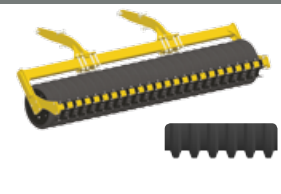


Cage Ø526 + Finisher Ø460




U-Sem Ø600 (Only mounted version)

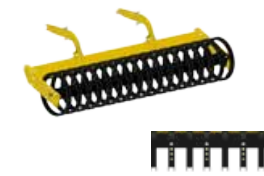

Double U-Sem Ø600 (Only trailed version)

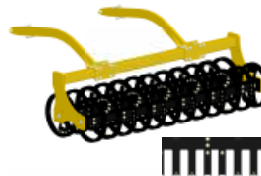

Steel-Pack Ø700

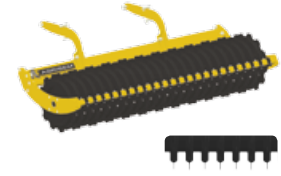

535 rue Pierre Levasseur
44158 ANCENIS - FRANCE

T. +33 (0)2 51 14 14 40
F. +33 (0)2 40 96 32 36

agrisem@agrisem.com
www.agrisem.com



Your dealer