


Straw harrow



5 rows of harrows

of wheat after corn harvest

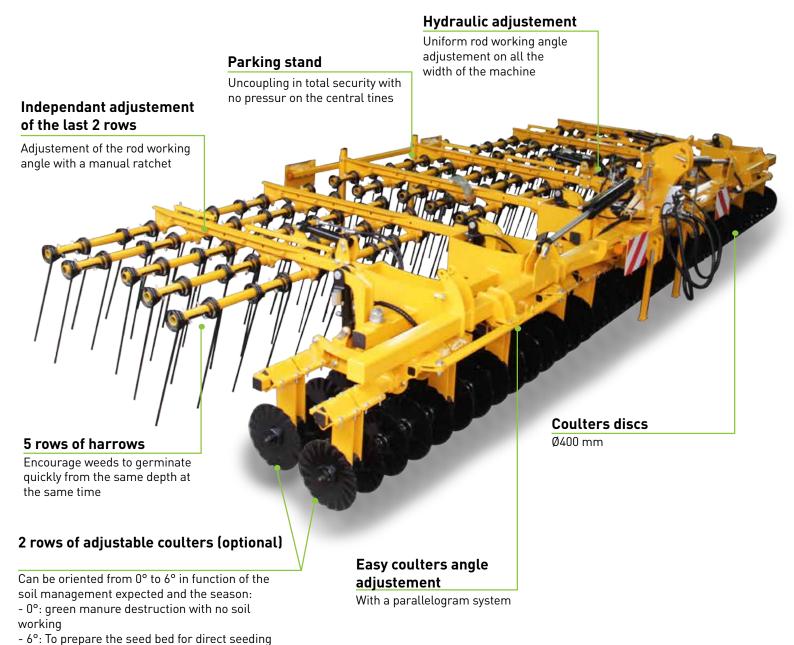

- Creating a quick and effective germination of weed seeds
- Good repartition of the straw on the field
- Destroying slug eggs and reduce slug activities

Hydraulic adjustement





- Adjustment of the rod working angle from the cab
- Ensure a precise working deppth adjustement
 - Quickly off pressure in wet or green areas to avoid blockages

Independant adjustement of the last 2 rows





- +
- Shallow tillage with the 3 first rows on the top soil (2-4cm)
- Allow an agressiver and deeper work with the 2 last rows for summer management of crop residues
- Easy adjustement with a manual ratchet

Transport width 3m

Options

2 rows of adjustable coulters







Front depth control wheels



- Favors hight speed work in difficult condition
- Ensure a precise working depth adjustement
- Good stability of the machine with a hight working width

- To increase the chopping of the straw - Coulters can be orientated from 0° to 6°
- Hydraulic adjustement of the working depth

Specifications



Seeding ramp



DSF 1000



DSF 1600 /2200

Angebaut		
Working width	6,20	8,60
△ Weight (kg)	1 670	2 310
Weight (kg) with coulters	3 590	4 990
Oo Power (hp)	130 - 180	150 - 200
Number of tines	50	70
Number of coulters	60	76



535 rue Pierre Levasseur 44158 ANCENIS - FRANCE T. +33 (0)2 51 14 14 40 F. +33 (0)2 40 96 32 36 agrisem@agrisem.com www.agrisem.com γ our dealer