

**Maximulch**

**Serie 5 / Serie 6**

Soil preparing tools  
Blade / Disc combinations

**Serie 5**



**Serie 6**



**The Professional's Choice**

# Exclusive technology

## Maximulch Serie 5

**Hydraulic draw bar**

**Hydraulic adjustment**

of the discs' working depth, independently from the blades - with accumulator

**Non-Stop spring security**

750 Kg at the tip

**Hydraulic adjust cent**

You can adjust the work with the transport wheel up the roller in wet

**Hydra**  
of the w

**3D® Security**

35 X 35 mm

**Discs Mulcher + Hub SRE**

Discs Ø 610  
Maintenance free hubs

**AGM HD tines**

or TCS 550 blades

**Transport wheels**

500/45x22,5

### Exclusivity on SERIE 5

**TCS 550 blade**

**PATENTED**

- Loosening by vertical cracking
- No disturbance of horizons
- Facilitates crop growing capillary rises



**Levelling discs Ø 560**

Homogeneous surface

**Flexi-Roll Ø700 roller**

Several rollers according to your soil

### AGM tines with stubble-braker shares

**Optional**

**Carbid BETEK® Technology**

Share width 80 mm  
Carbid wings adaptables

- 5 to 10 times more life expectancy
- Regular quality of the work
- Easy to replace



### Levelling-out



- Non-stop spring security with 750 kg of pressure at the tip
- Work up to 40 cm deep
- Deep cultivation

- Perfect state of the surface
- Improved ground structure
- Facilitated gestion of the crop

**Automated**

Working depth  
adjusts to lift  
condition

**Hydraulic adjustment**

Working depth of blades

Intensive mixe  
of residues



**Serie 6**



**Serie 5**

**Maximulch**

10 cm

Deep  
loosening

40 cm

**Transport**

500/45x2

**Working depth  
adjustment**


of levelling discs

**Hydraulic adjustment**

of working depth

**Agrix Ø700 roller**

Several rollers according to  
your soil

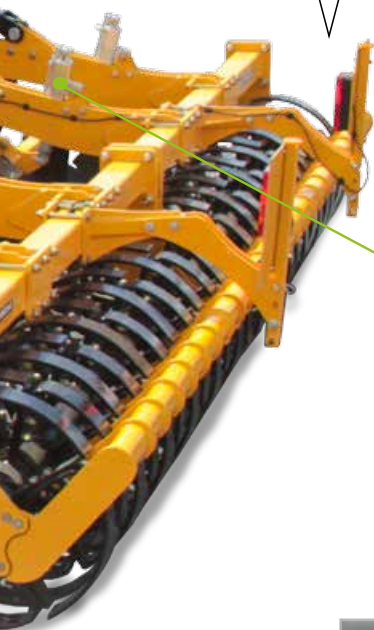


	Space between tines	Working in crop residues	Mixe of residues in surface	Half-deep tillage	Deep loosening
Maximulch serie 6	45 cm	+++	+	++	+++
Maximulch serie 5	30 cm	++	+++	+++	+

**Hight clearance**


**Serie 5**

Under frame  
clearance : 890mm

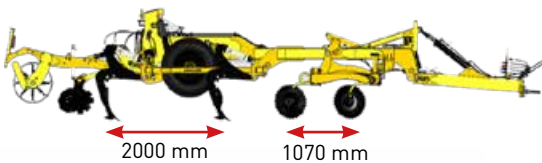

**Serie 6**


Under frame  
clearance : 800mm

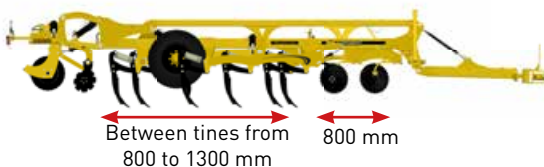

**3D security with percussion effect**

Positive pan and working angles

**Patented**

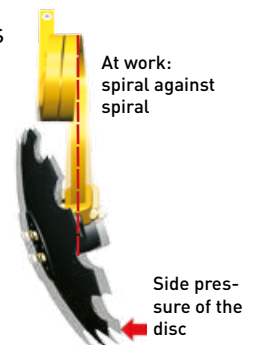

- Hight space between elements
- Ensure good throughflow of soil
- Facilitate work with residues




- Quality of work
- Energy saving
- No maintenance

# Complete soil preparation in one-pass

Work up to 40 cm deep From 6 to 12 km/h

## h Serie 6

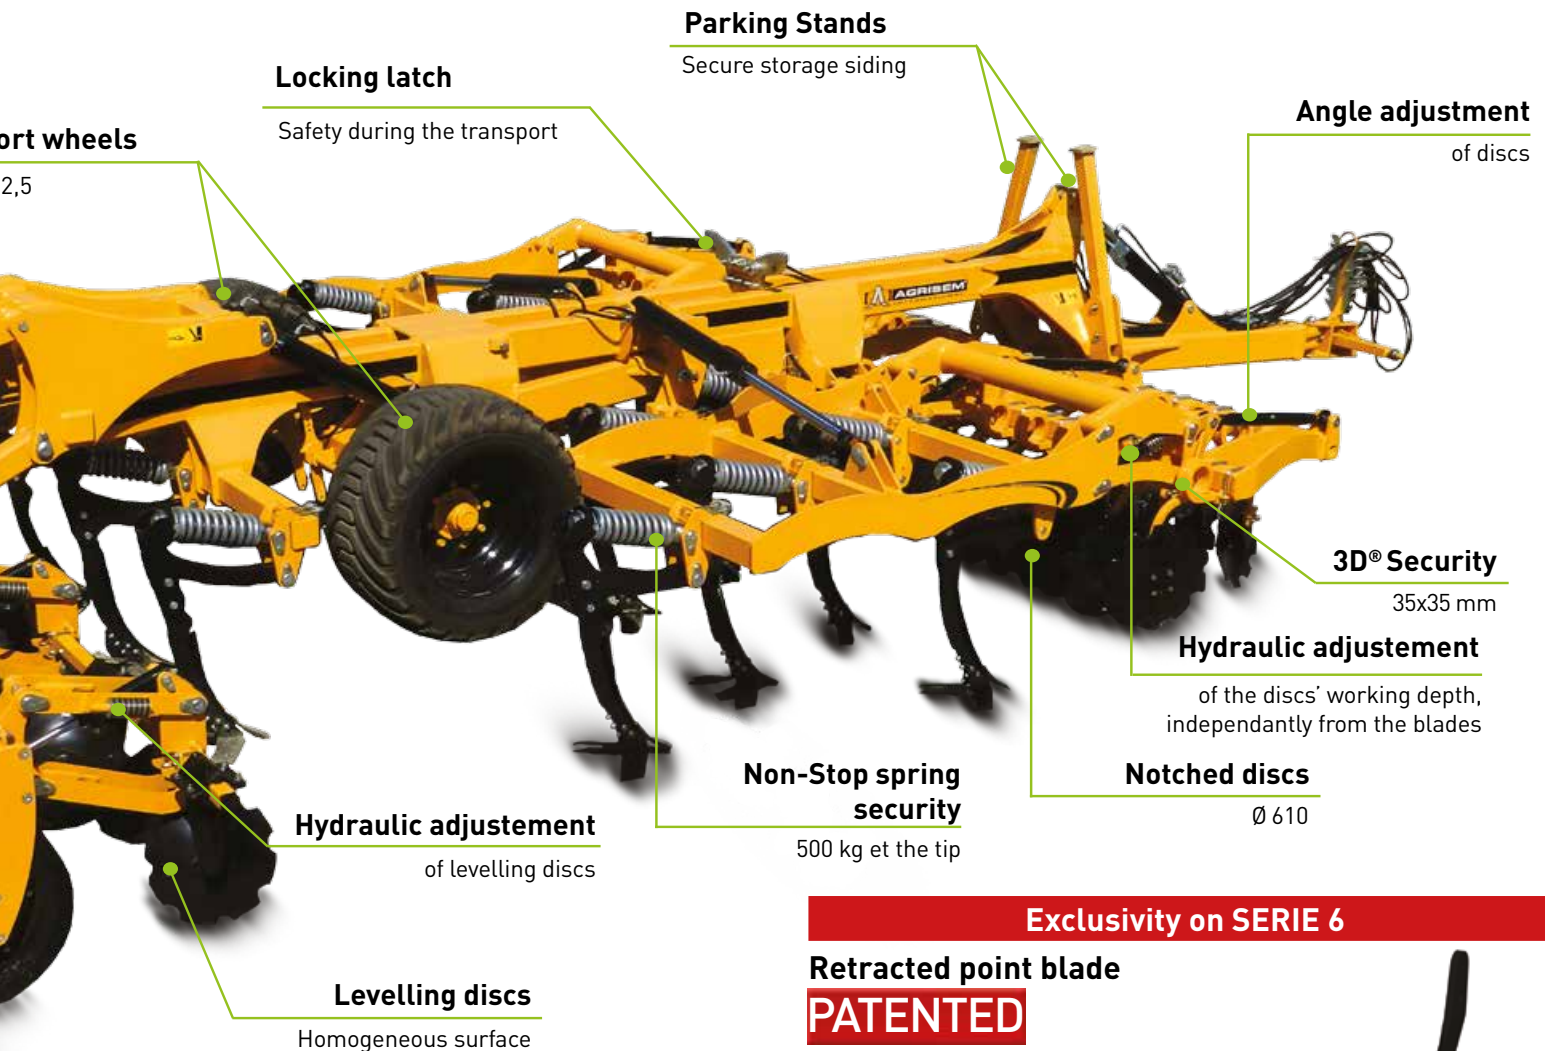

### Exclusivity on SERIE 6

#### Retracted point blade

**PATENTED**


By replacing the tines by blades, it becomes a soil loosener




- 1 machine for 2 fonctions
- Use all year long



### Work with or without wings

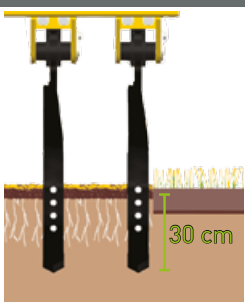

Without the wings:  
work at 30 cm deep

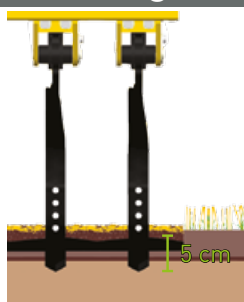

With the wings:  
work at 5 cm deep



- Versatility of use
- Intensive mix of residues (with wings)
- Deep cultivation (without wings)

### AGM tines with stubble-braker shares

#### Optional

#### Carbid BETEK® Technology

Share width 80 mm  
Carbid wings adaptables

- 5 to 10 times more life expectancy
- Regular quality of the work
- Easy to replace



- Non-stop spring security with 750 kg of pressure at the tip
- Intensive mix of soil
- Loosening down

# Specifications

**Maximulch**








**Serie 6**



DS 200/500


## TRÂINÉ

## Foldable Models


	4,00	5,00	6,00
 Working width (m)	4,00	5,00	6,00
 Transport width (≈ m) (without accessories)	3,00	3,00	3,00
 Power req. mini / maxi (hp)	200 - 300	280 - 380	350 - 450
 Weight (≈ in kg)	8 270	9 360	10 450
 Number of discs	20 + 2	27 + 2	34 + 2
 Discs diameter (mm)	Ø 610	Ø 610	Ø 610
 Number of tines	13	15	19

## R O L L E R S


Cage Ø526

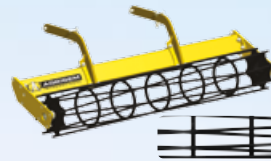

Flexi-Roll Ø700

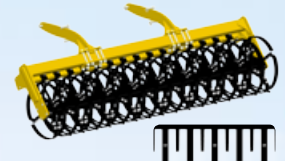

V-Sem Ø600

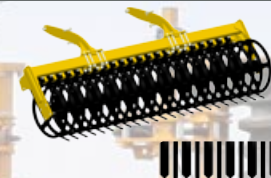

T-Sem Ø620



U-Sem Ø600



Cage Ø526 + Finisher  
Ø460




Agrix Ø700



Steel-Pack Ø700



Covering harrow

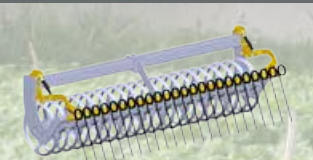








# Maximulch Serie 5

## TRAILED

### Rigid Models

### Foldable Models

 Working width (m)	<b>3,00</b>	<b>4,00</b>	<b>4,00</b>	<b>5,00</b>
 Transport width (≈ m) (without accessories)	3,00	4,00	3,00	3,00
 Power req. mini / maxi (hp)	180 - 320	240 - 450	240 - 450	300 - 500
 Weight (≈ in kg)	5 220	6 220	7 800	8 560
 Number of discs	17	25	25	29
 Discs diameter (mm)	Ø 610	Ø 610	Ø 610	Ø 610
 Number of tines or blades	7	9	9	11

## ROLLERS






### Cage Ø526

### Flexi-Roll Ø600

### V-Sem Ø600

### T-Sem Ø620

### U-Sem Ø600





### Agrix Ø500 et Ø700

### Steel-Pack Ø700

### Cage Ø526 + Finisher Ø460

### Covering Harrow



535 rue Pierre Levasseur  
44158 ANCENIS - FRANCE

T. +33 (0)2 51 14 14 40  
F. +33 (0)2 40 96 32 36

agrisem@agrisem.com  
www.agrisem.com



Your dealer