


## Independant disc stubble-breaker



Transport width 3m

### Individual rubber suspension

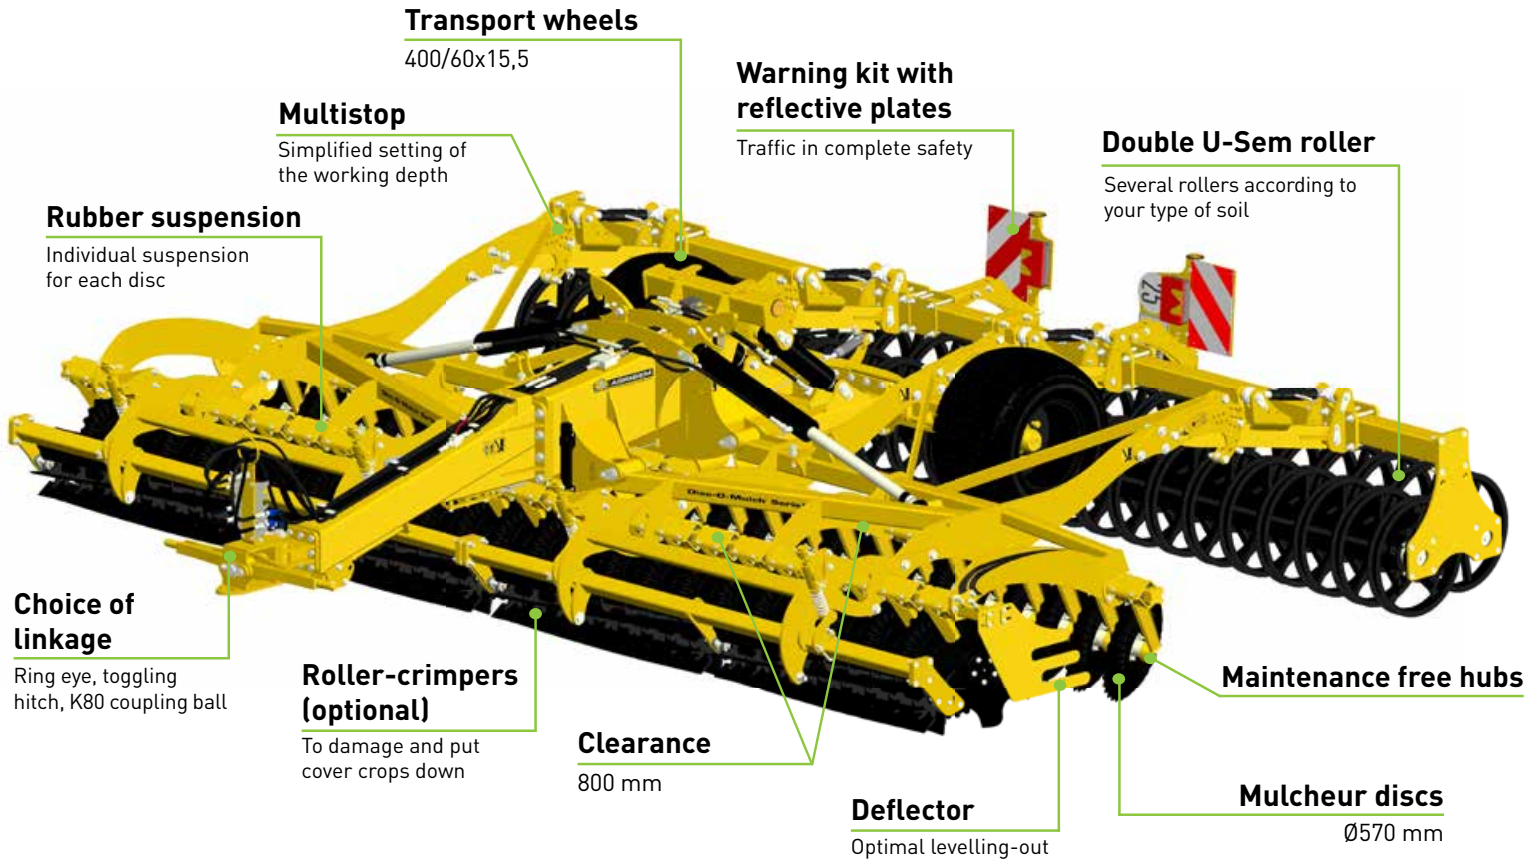

Free maintenance and bolt hubs


- Discs can individually avoid obstacle for an excellent depth control
- Ideal for a shallow cultivation at high speed (12-15 km/h)
- Allow to have a lighter machine

### High clearance



- Important release under the frame
- Large between-beams for the destruction of the crops
- Able to work in the important crops or to damage intercrops



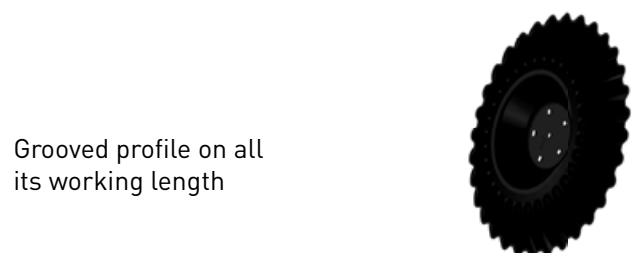

### MULCHER disc



Grooved profile on all its working length

- Maximum mincing of crop
- Self-cleaning in wet conditions
- Unchanged working quality with the wear of the disc

# Specifications

TRAILED	Foldable versions		
 Working width	4,50 m	5 m	6 m
 Weight (kg) with cage roller	3 920	4 120	4 480
 Power (hp)	140 - 190	150 - 200	160 - 210
 Number of discs	36	40	48



Approved  
machine



DS 200/500



DSF 1000




DSF 1600/2200




DSA

## Rollers


Cage Ø526

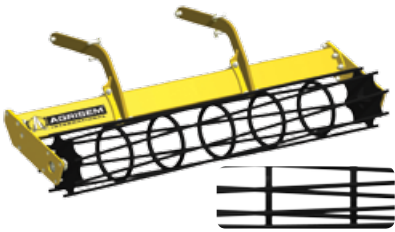


Flexi-Roll Ø600

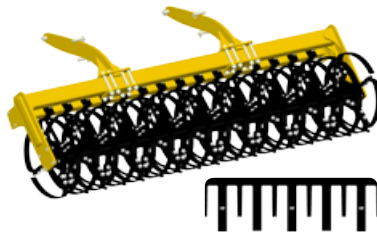


Agrix Ø500

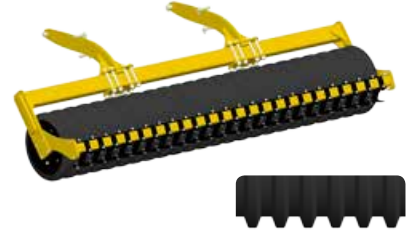


V-Sem Ø600

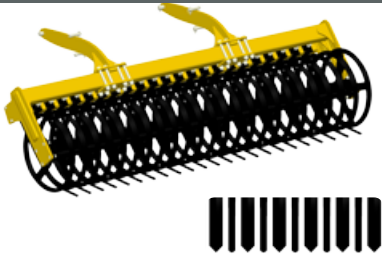


T-Sem Ø620

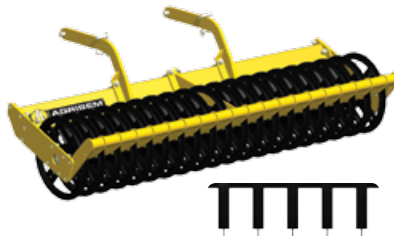

Flexi-U Ø600

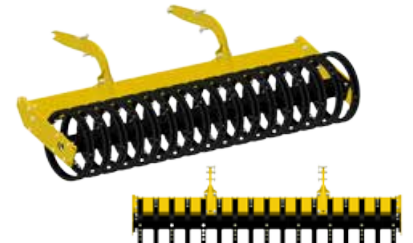


Levelling harrow

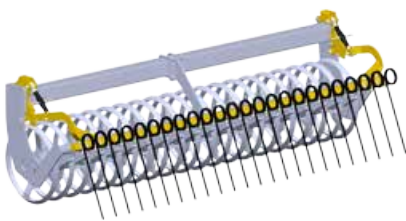

Cage Ø526 + Finisher  
Ø460



Double Flexi-U Ø600

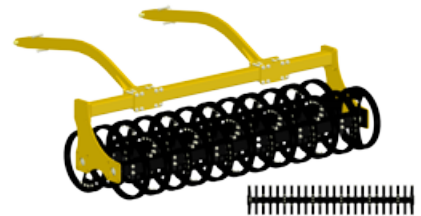

Your dealer

535 rue Pierre Levasseur  
44158 ANCENIS - FRANCE

T. +33 (0)2 51 14 14 40  
F. +33 (0)2 40 96 32 36

agrisem@agrisem.com  
www.agrisem.com

