

Vibromulch®

Stubble breaker with vibrating tines



 **AGRISEM**
INTERNATIONAL

The Professional's Choice

Exclusive technology

Vibromulch®

Hydraulic working depth adjustment

Central adjustment of working depth

Double U-Sem roller

Several rollers according to your soil

3D security tines (optional)

Levelling harrow (optional)

Levelling the soil

V-Sem roller

Several rollers according to your soil

Transport wheels

480/45-17

Multistop

Simplified setting of the working depth

3 rows harrow

Crumbling and levelling the soil

Support wheels

central support wheels with 3 rows harrow

Straight share

or sweep share

Levelling harrow



Levelling harrow placed before or after the roller

Choose your configuration



Sweep shares

Straight shares

- For a perfect seedbed preparation
- + Good levelling
- Ideal for maximum crumbling in heavy soil

- Enables an optimal work
- + Power saving and excellent crumbling
- Scalps on the width with an important penetration

Vibrate to stubble break

Work up to 15 cm deep From 6 to 12 km/h

Vibromulch mounted 4 / 5 / 6 m



Between-beam

550 mm

Support wheels (optional)

front support wheels with rollers

Toggling hitch Cat.3 (optional)

Coupling eye Ø50 mm (serial)

Disc coulters (optional)

Favors cutting of residues

Cross-board (optional)

To Level the ground

Vibrating tines 70x12 mm

Exclusivity

Vibrosem



With a DSF front hopper, transform your stubble-breaker in a seeder (only for mounted version)

Choose your type of tine

3D security tine
30x30 mm



Vibrating tine
70x12 mm



- An important penetration in all conditions
- Intensive work for a good mixed of residues
- Usable in first stubble break or after plowing

- Intensive and shallow cultivation
- Heats and ventilates the soil surface
- Usable in second stubble break or seed bed preparation

Stability of the machine




Front support wheel with roller

Double support wheel with 3 rows harrow

- Favors high speed work in difficult condition
- Ensure a precise working depth adjustment
- Hydraulic control of double support wheel



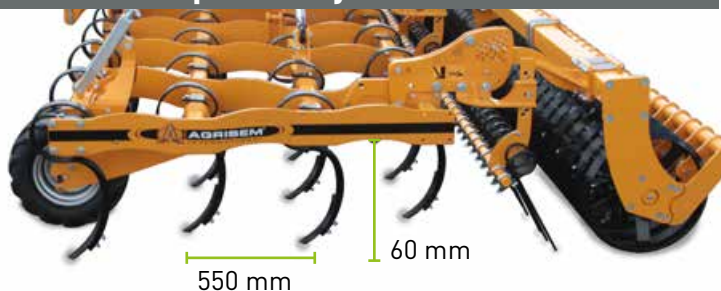

Spaced layout of tines



4 rows of tines on mounted versions and 5 rows of tines on trailed versions

- High clearance under frame and between beam
- Intensive breaking of the soil
- Able to work in the important crops

Specifications


	Mounted			Trailed	
 Working width	4,00	5,00	6,00	6,00	8,00
 Weight (kg) with cage roller	2 200	2 500	2 800	4 500	5 000
 Power (hp)	120 - 160	140 - 200	160 - 230	200 - 320	240 -360
 Number of tines	24	32	36	36	48



Approved
machine



Cross-board



Coulters
discs



DSF

ROLLERS



Cage Ø450 	T-Sem Ø620 	
Flexi-Roll Ø600 	U-Sem Ø580 	
3 rows harrow 	V-Sem Ø600 	
Double U-Sem Ø600 (only on trailed machine) 	Levelling harrow 	Rouleau cage Ø526 + Finisher Ø460 



535 rue Pierre Levasseur T. +33 (0)2 51 14 14 40 agrisem@agrisem.com
 44158 ANCENIS - FRANCE F. +33 (0)2 40 96 32 36 www.agrisem.com

Your dealer