

Cultiplow®

Soil loosener



The Professional's Choice

Exclusive technology

Cultiplow®

Frame

200x200 mm beam

Pushing bar

Centralized setting

Spring (or optional)

Unequal

Standard coupling

Cat. 3

Carbide tip

Serial: protection against wear
Optional: Socs Easy-Carbi



Parking stand

Uncoupling total security

Agronomy

Performance

PATENTED

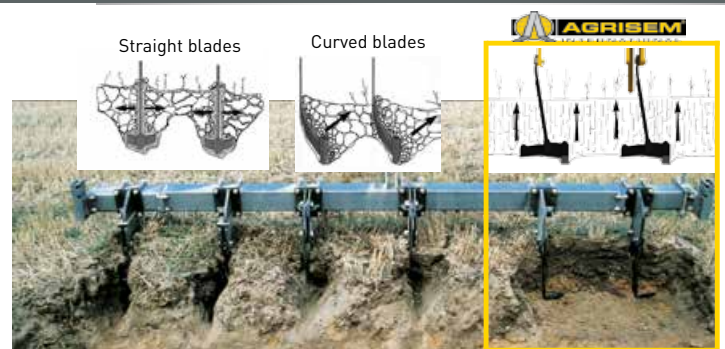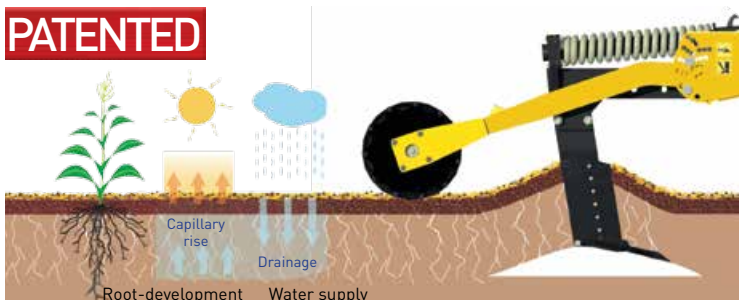

- No disturbance of horizons
- Vertical cracking by the creation of a wave
- Facilitates crop growing capillary rises



- Homogeneous soil loosening on the entire width
- Without «blockage effect»
- Without creation of clods

The only known blade by des agronomists

Work from 15 cm to 45 cm deep From 5 to 10 km/h

ing security
bolt security)

led clearance

Combimulch 35

Preparation of the soil on the surface



Ø526 cage roller


Several rollers according to your type of soil

Multistop

Simplified setting of the working depth

Shifted tip blade

TCS 750

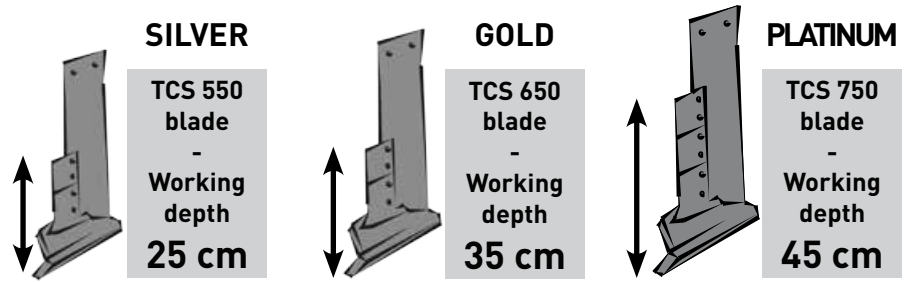


6 m foldable semi-mounted
Ø526 cage roller

Exclusivity



Grassland Cultiplow
Ø540 Flexi-Sem roller

Economy

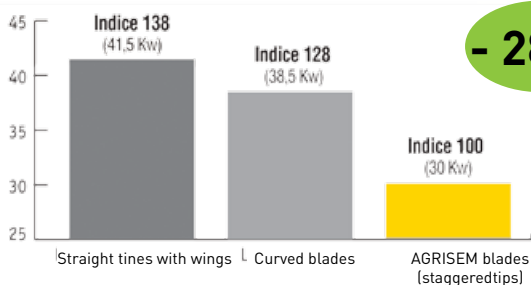


Résultats of official trials by Derval (FR).
Power consumption of a 3m soil loosener working at 30 cm deep.

- Nearly 30% less power than a traditional soil loosener
- Improved productions

Strong frame







- Important release under the frame
- Frame made for any type of use
- Different versions according to your equipments





SILVER	Fix versions	
 Working width	2,50 m	3,00 m
 Weight (kg) with cage roller	757	904
 Power (hp)	70-120	90-150
 Number of blades	4	5

Specifications



Approved machine

GOLD	Fix versions				Retractable version	Foldable versions		
 Working width	2,50 m	3,00 m	3,50 m	4,00 m	4,00 m	4,50 m	6,00 m	8,00 m
 Weight (kg) with cage roller	1 593	1 911	2 269	2 627	3 034	4 613	5 361	7 147
 Power (hp)	90-180	110-210	150-230	170-250	170-250	200-280	280-380	380-450
 Number of blades	3	4	5	6	6	6	8	11

PLATINUM	Fix versions				Retractable version	Foldable versions		
 Working width	2,50 m	3,00 m	3,50 m	4,00 m	4,00 m	4,50 m	6,00 m	8,00 m
 Weight (kg) with cage roller	1 640	1 980	2 350	2 720	3 140	3 630	4 060	5 220
 Power (hp)	90-180	110-210	150-230	170-250	170-250	255-320	335-425	420-550
 Number of blades	3	4	5	6	6	6	8	11

ROLLERS



Cage Ø526



Flexi-Sem Ø540



Steel-Pack Ø700



Combimulch 35



Combimulch 30



Combimulch 35 + Steel-Pack
Only on fix version



535 rue Pierre Levasseur
44158 ANCENIS - FRANCE

T. +33 (0)2 51 14 14 40
F. +33 (0)2 40 96 32 36

agrisem@agrisem.com
www.agrisem.com



Your dealer